

### MATERIALS LIST

VALVE BODY: ASTM A276 316L  
VALVE BONNET: ASTM A276 316L  
VALVE STEM: ASTM A276 316L  
STEM SEAL: PERFLOURINATED ELASTOMER  
SEAT: PEEK  
VENT VALVE: ASTM A276 316L  
OPERATING HANDLE: ASTM A108  
SENSOR PORT PLUG: ASTM A108 NACE COMPLIANT


### NOTE:

IT IS THE RESPONSIBILITY OF THE END USER OF THIS EQUIPMENT TO CHECK MATERIALS FOR COMPATIBILITY WITH THE PROCESS GAS AND CONDITIONS.

VALVE TO BE ADEQUATELY BRACED TO PREVENT MECHANICAL DAMAGE OR DAMAGE DUE TO VIBRATION.

WEIGHT: APPROX. 2.5 LBS

VALVE BODY HAS A SQUARE CROSS-SECTION, EXCEPT FOR THE TRANSDUCER END AS SHOWN.

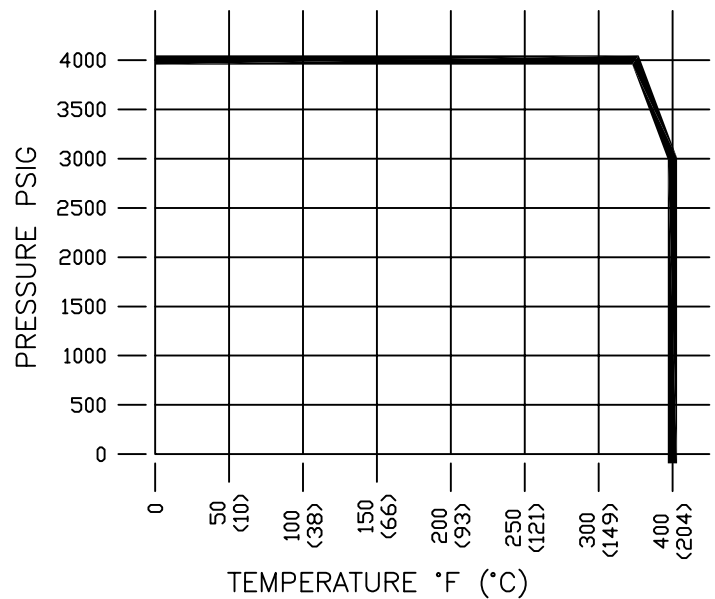

## KIENE DIESEL ACCESSORIES

325 SOUTH FAIRBANKS STREET, ADDISON, ILLINOIS, 60101

DATA SHEET, DOUBLE BLOCK & BLEED VALVE  
1/2NPT X SAE J1926/1 (7/8-14) PORT

CURRENT REVISION: A DATE: 6/5/13 DRAWING NAME: SP-06242-SS316 DATA SHEET