

## MATERIALS LIST

VALVE BODY: ASTM A108

BONNET: ASTM A182, A276 DUPLEX 2205

STEM: ASTM A182, A276 DUPLEX 2205

STEM SEAL: PERFLUORINATED ELASTOMER

SEAT: PEEK

VENT VALVE: ASTM A108

OPERATING HANDLE: ASTM A108

VALVE CAP & PLUG:

VALVE CAP: ASTM A108


VALVE CAP PLUG: ASTM A108

### NOTE:

IT IS THE RESPONSIBILITY OF THE END USER OF THIS EQUIPMENT TO CHECK MATERIALS FOR COMPATIBILITY WITH THE PROCESS GAS AND CONDITIONS.

VALVE TO BE ADEQUATELY BRACED TO PREVENT MECHANICAL DAMAGE OR DAMAGE DUE TO VIBRATION.

WEIGHT: 2.5#

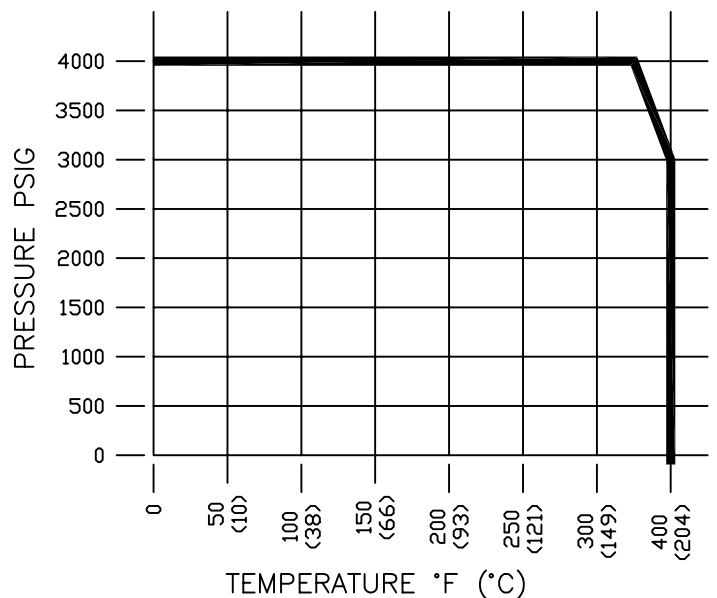

## KIENE DIESEL ACCESSORIES

325 SOUTH FAIRBANKS STREET, ADDISON, ILLINOIS, 60101

DATA SHEET, SP-06358 DOUBLE BLOCK & BLEED VALVE  
1/2NPT X STANDARD INDICATOR CONNECTION,  
1/4 ORIFICE, (2) VENT VALVES

CURRENT REVISION: A

FILE NAME: SP-06358  
DATA SHEET

DRAWING NUMBER:

SP-06358 DATA SHEET