


| MATERIALS LIST | | |
|----------------|-------------|---------------------------|
| ITEM | DESCRIPTION | MATERIAL |
| 1 | VALVE BODY | AISI-SAE 1215, ASTM A-108 |
| 2 | VALVE STEM | ASTM A-582, TYPE 303SE |
| 3 | TAPER PIN | AISI-SAE 1215, ASTM A-108 |
| 4 | CAP NUT | AISI-SAE 1215, ASTM A-108 |
| 5 | CAP PLUG | AISI-SAE 1215, ASTM A-108 |
| | | |

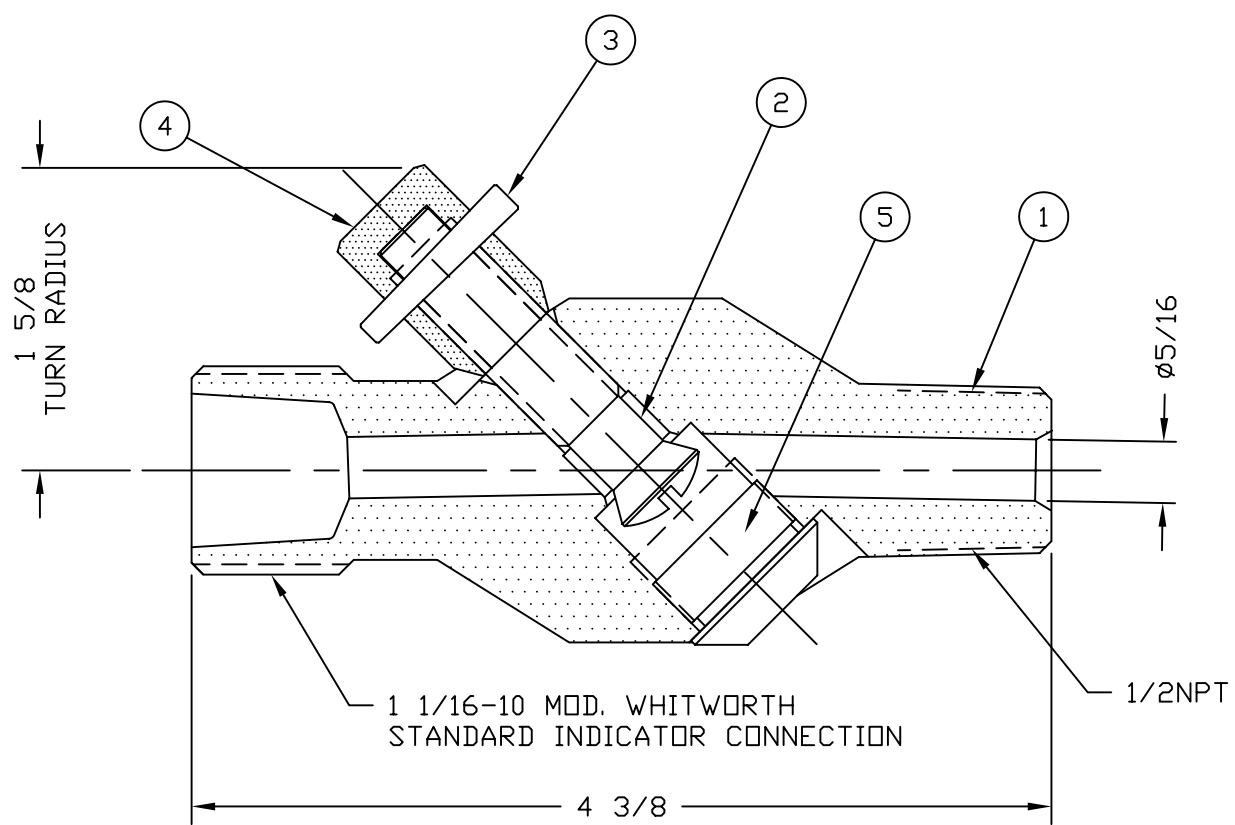

PRESSURE/TEMPERATURE RATING:

V-LINE VALVES ARE SUITABLE FOR SERVICE UP TO A MAXIMUM OF 3000 P.S.I. AT 800 DEGREES F.;

NOTE:

IT IS THE RESPONSIBILITY OF THE END USER OF THIS EQUIPMENT TO CHECK MATERIALS FOR COMPATIBILITY WITH THE PROCESS GAS AND CONDITIONS.

| | | |
|--|----------------------------|---------------------------------|
| KIENE DIESEL ACCESSORIES | | |
| 325 SOUTH FAIRBANKS STREET, ADDISON, ILLINOIS, 60101 | | |
| DATA SHEET V-44 INDICATOR VALVE | | |
| CURRENT REVISION: B | FILE NAME: V-44 DATA SHEET | DRAWING NUMBER: V-44 DATA SHEET |