

"E" END CONNECTION FOR KN-428, -43B AND -44B IS THE STANDARD INDICATOR CONNECTION (1 1/16-10 MODIFIED WHITWORTH THREAD WITH TAPERED SOCKET). ITEM 16, VALVE CAP AND PLUG IS FURNISHED WITH THE VALVE.

"E" END CONNECTION FOR KN-41B IS A 1/2NPT(F) PORT. ITEM 17, 1/2NPT PLUG IS FURNISHED WITH THE VALVE.


VALVE MODEL	A	B	C	D	E	WT. (LBS)
KN-41B	4-3/8	2-1/4	15/16	1/2NPT	1/2NPT(F)	2.2
KN-42B	4-3/8	2-1/4	15/16	1/2NPT	INDICATOR CONNECTION	2.0
KN-43B	4-3/8	2-1/4	1-11/64	3/4NPT	INDICATOR CONNECTION	2.0
KN-44B	5-3/8	3-1/4	1-15/16	1/2NPT	INDICATOR CONNECTION	2.1

**DIMENSIONS**

**MATERIALS LIST**

ITEM	DESCRIPTION	MATERIAL
1	VALVE BODY	ASTM A276, A479 316
2	VALVE STEM	ASTM A276, A479 316
3	SEAT	REINFORCED PEEK
4	GLAND NUT	ASTM A276, A479 316
5	BUSHING	ASTM A276, A479 316
6	O-RING	PERFLUORINATED ELASTOMER
7	BACK-UP RING	PEEK
8	BONNET WASHER	ASTM A276, A479 316
9	HANDLE	ASTM A108
10	SPINDL PIN	ASTM A276
11	VENT VALVE	ASTM A276 316
12	HEX JAM NUT	ASTM A276, A479
13	BONNET LOCK	ASTM A108
14	SDC HD CAP SCREW	ASTM A108
15	HEX HD CAP SCREW	ASTM A108
16	VALVE CAP & PLUG	CAP: ASTM A108, PLUG: ASTM A276 316
17	1/2NPT PLUG	ASTM A276 316
18	LANYARD	ASTM A276

NOTE: ITEMS 16, 17, 18 ARE NOT ILLUSTRATED.

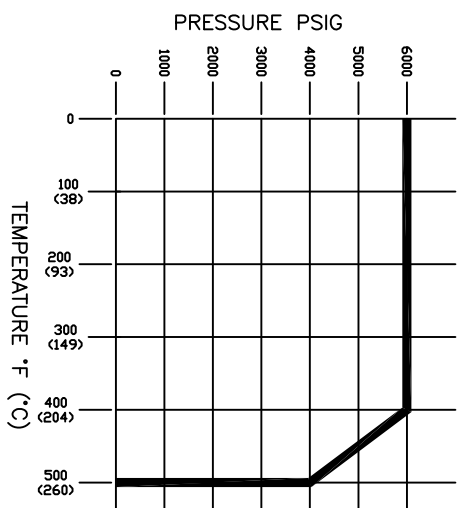

NOTE: IT IS THE RESPONSIBILITY OF THE END USER OF THIS EQUIPMENT TO CHECK MATERIALS FOR COMPATIBILITY WITH THE PROCESS GAS AND CONDITIONS.

**KIENE DIESEL ACCESSORIES**

325 SOUTH FAIRBANKS STREET, ADDISON, ILLINOIS, 60101

DATA SHEET, KN-40 SERIES NEEDLE-TYPE VALVES, 316SS CONSTRUCTION

DRAWING REVISION: \* DATE: 10/13/16 DRAWING NAME: DATA SHEET, KN-40 SERIES STAINLESS STEEL